


GLORY FRAMING

XP-1000SZF

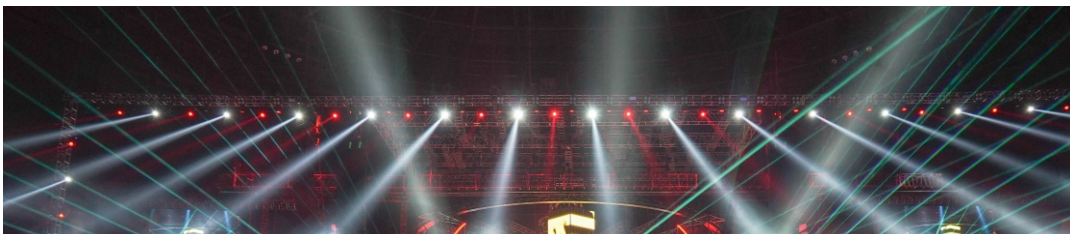

Discharge Moving Head

13

Specifications

Light Source: Osram HT11000W/PS Lok-it
Color Temperature: 6000K
Beam Angle: 9°~61°

Control

DMX Channel: 34/40 channels
Control Mode: DMX, Art-Net, RDM, Wireless (optional)
Firmware Upgrade: Update via DMX link

Pan/Tilt

Pan/Tilt: 540°/ 270°
Pan/Tilt Resolution: 16 bit
Fixation: Pan/Tilt lock

Construction

Display: LCD display
Battery backup for user operation without connecting to the main
Data In/Out : 3-pin and 5-pin XLR
Power In/Out: PowerCon in
Protection Rating: IP20

Electrical and Physical


Power Voltage: AC 230V, 50/60Hz
Power Consumption: 1350W
Dimensions: 454x427x811mm
Weight: 40Kg

Features


Linear motorized zoom :9°~61°
Motorized focus
CMY color mixing + linear CTO
Color Wheel: 6 colors plus open with rainbow effect
Gobo Wheel: 1 rotating gobo wheel with 5 gobos plus open
Gobo's outside diameter: 37.3mm
Gobo's image diameter: 27mm
Excellent color macro effect
Animation wheel: perfect water wave and flame effects, rotatable and replaceable
4 fast and smooth framing shutters, each shutter blade position and angle can be controlled individually; complete framing module can be rotated at 90°
Motorized linear iris
0~100% smooth dimming
4 facet prism rotating in both directions
Independent frost effect
Various strobe speeds




CMY+CTO/Color/Gobo Wheel

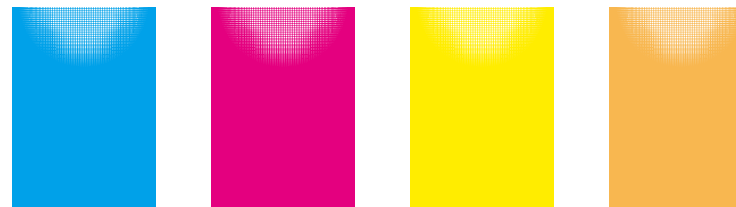


CMY+CTO




Color Wheel



Framing Module




Animation Wheel




Rotating Gobo Wheel

Dimensions(mm)

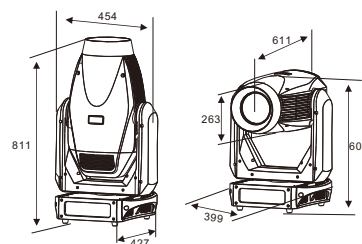

Photometrics Diagram

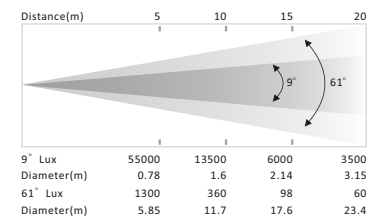

Discharge Moving Head

14