

FLANDINA 22 IP

BAR 22 IP

FEATURES

- Light Source: 12x10W RGBWA LED
108x3W CW LED
- 12 pcs LED pixel control
- Outstanding strobe effect with variable speed
- 0~100% smooth dimming
- Double mounting brackets design and the adjustable angle reaches 180 degrees in both direction and a pair of fully-new designed foldable clamps have been integrated on the back to reduces installation time.
- Flicker free management



TECHNICAL SPECIFICATIONS

Light Source

- Light Source: 12x10W RGBWA LED
108x3W CW LED
- Rated Source Life: up to 20,000 hours*

Optical System

- Beam Angle: 30°(RGBWA)
116°(CW)
- Field Angle: 56°(RGBWA)
160°(CW)

Control and Program

- Display: OLED display
- Control Mode: DMX512, RDM
- DMX Protocol modes: 7
- Control channels: 6/7/8/10/15/16/72/75
- Upgrade the firmware via DMX link


Electrical and Connectors

- Power supply with electronic auto-ranging
- Input voltage range: 100-240V~ 50/60Hz
- Power consumption: 300W
- Power In/Out: Waterproof Power Connector in/out
- Data in/out: Waterproof 3-pin or 5-pin XLR
- Protection Rating: IP66


Specification

- Fixture Specification: 998 x 92 x 185 mm (39.3" x 3.6" x 7.3")
Weight: 6.8 kg (15lbs)
- Carton dimension: 1085 x 245 x 175 mm (42.7" x 9.7" x 6.9")
Weight: pending

PHOTOMETRICS DIAGRAM

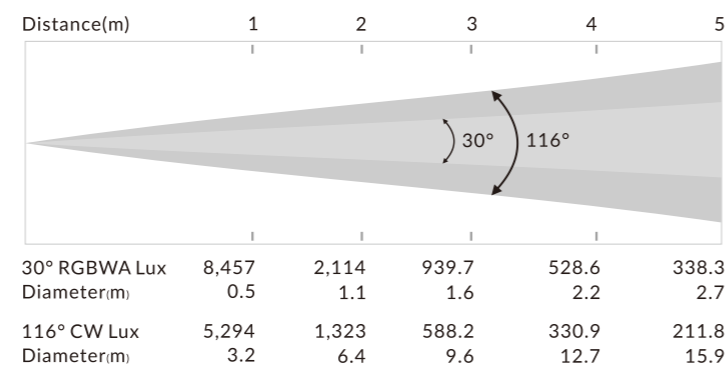

DIMENSIONS

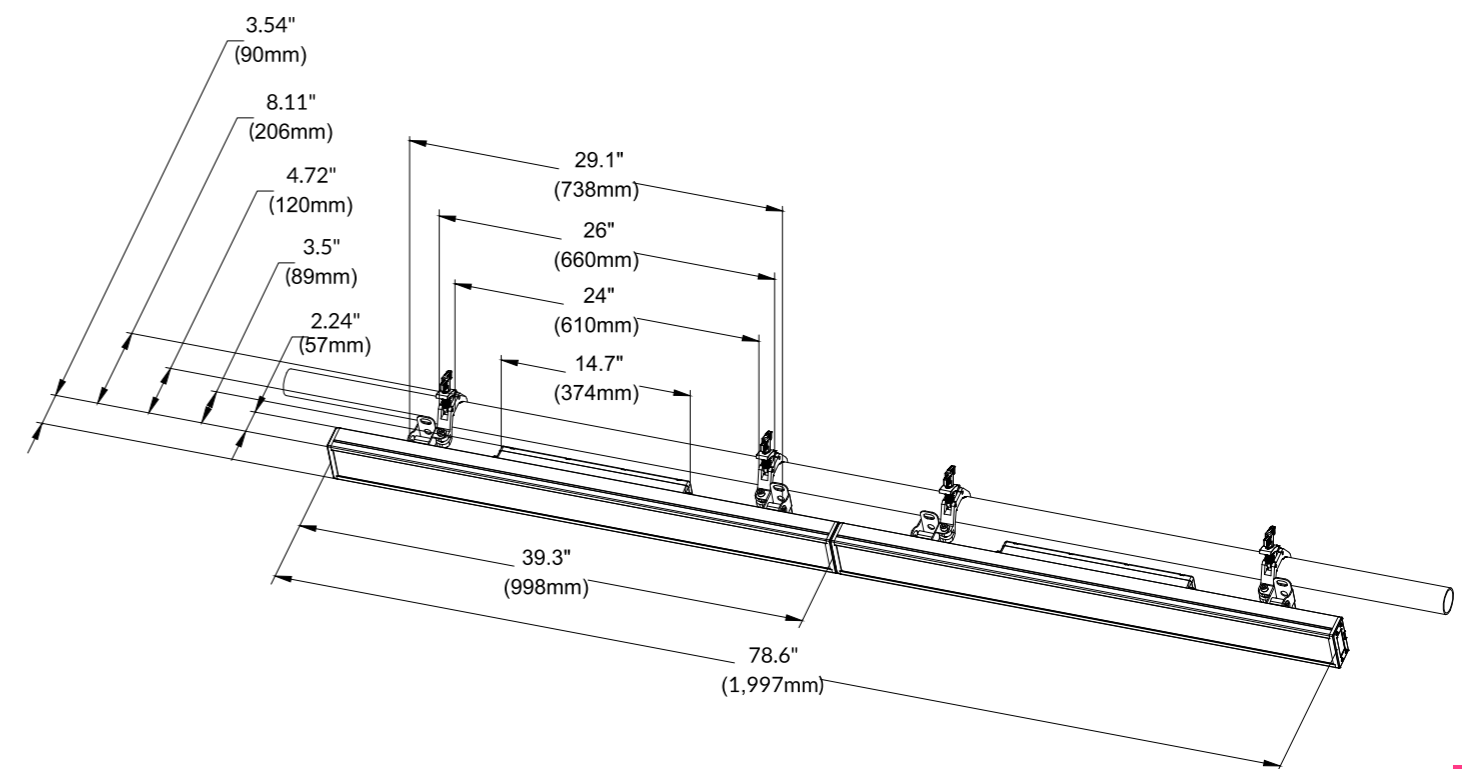

(*Light source's working life depends on the cycle ratio of its usage pattern and other environmental factors, such as dust, oil, temperature, humidity, etc.)

