

SABER

XP-5R BEAM



Discharge Moving Head

25

Specifications

Light Source: Philips MSD Platinum SR
Color Temperature: 8000K
Beam Angle: $1^{\circ} \sim 3.8^{\circ}$

Control

DMX Channel: 16/19/20 Channels
Control Modes: DMX, wireless control (Optional)
Firmware Upgrade: Update via DMX link


Pan/Tilt

Pan/Tilt: $540^{\circ} / 250^{\circ}$
Pan/Tilt Resolution: 16 bit
Fixation: Pan/Tilt lock


Construction

Display: LCD display
Data In/Out: 3-pin & 5-pin XLR
Power In/Out: PowerCon in/out
Protection Rating: IP20

Photometrics Diagram

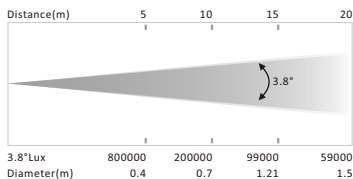

Dimensions (mm)

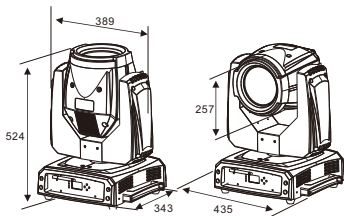

Electrical and Physical

Power Voltage: AC 100~240V, 50/60Hz
Power Consumption: 290W
Dimensions: 435x343x524mm
Weight: 19Kg

Features

Motorized Focus
Color wheel: 14 fixed colors plus open with rainbow effect
Gobo wheel: 11 fixed gobos with 7 beam reducer
Outstanding color macro effect
Dimmer: 0~100% smooth dimming
Prism: 8 facet Prism rotation in both direction
Independent frost effect
Variable strobe speeds

