



ULTRA STROBE RGB ULTRA STROBE LED-ST1000 RGB LED-ST1000



Control

DMX channels:
1 / 2 / 3 / 4 / 6 / 7 channels (LED-ST1000RGB)
1 / 2 / 3 / 4 channels (LED-ST1000)
Control Modes: DMX, Master/Slave, Sound Active, remote control (BF-04D)
Firmware Upgrade: Update via DMX link


Construction

Display: LED display
Date In/Out: 3-pin & 5-pin XLR
Power In/Out: PowerCon in/out
Protection Rating: IP20

Electrical and Physical

Power Voltage: AC 100~240V, 50/60Hz
Power Consumption: 400W
Dimensions(mm): 479x108x174mm, 2.7kg
DimensionsJ(in): 18.8"x4.2"x6.8" in, 5.9lbs

Dimensions(mm)

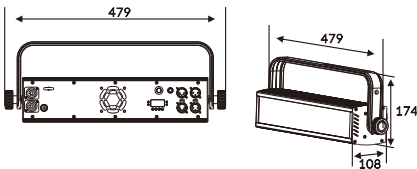

Specifications

Light Source: 99pcs RGB LED (LED-ST1000RGB)
99pcs CW LED (LED-ST1000)

Features

0~100% smooth dimming
DMX can create continuous blinder effect
Excellent thermal design, long lifespan for LED