



## Specifications

Light Source: 1 x 600W LED  
Color Temperature: 6500K  
Beam Angle: 7°~42°  
Luminous Flux: 19000lm

## Features

Linear CMY color mixing  
Linear CTO color correction  
Color Wheel: 1 color wheel with 6 colors plus open  
Gobo Wheel: 1 static gobo wheel with 8 gobos plus open  
1 rotating gobo wheel with 6 gobos plus open, easy to replace  
Gobo's outside diameter: 37.3 mm  
Gobo's image diameter: 27 mm  
4 facet prism rotating in both directions  
Motorized linear iris  
4 fast and smooth framing shutters, each shutter blade position and angle can be controlled individually; Each shutter blade can block out light completely, the framing module can be rotated at  $\pm 45^\circ$   
Independent frost effect  
Various strobe speeds

# SUPER GEIST FRAMING XA-600 FRAMING

## Control

DMX Channel: 30/32 channels  
Control Mode: DMX512, RDM  
Firmware Upgrade: Update via DMX link

## Pan/Tilt

Pan/Tilt: 540°/ 270°  
Pan/Tilt Resolution: 16 bit  
Fixation: Tilt lock


## Construction

Display: LCD display  
Battery backup for user operation without connecting to the mains  
Data In/Out: 3-pin and 5-pin XLR  
Power In/Out: PowerCon in  
Protection Rating: IP20


## Electrical and Physical

Power Voltage: AC 100~240V, 50/60Hz  
Power Consumption: 850W  
Dimensions(mm): 454x335x816mm, 39.5kg  
Dimensions(in): 17.8"x13.1"x32.1" in, 87.1lbs


## Photometrics Diagram




## Dimensions(mm)

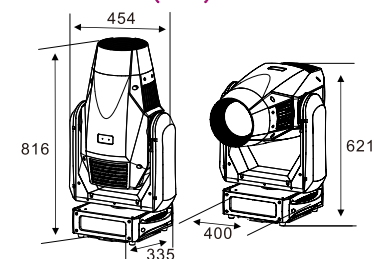


## CMY+CTO/Color/Gobo Wheel

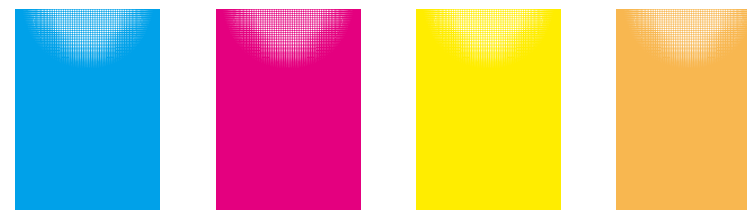


CMY+CTO




Color Wheel



Framing Module



Static Gobo Wheel



Rotating Gobo Wheel