

HAIL™

STROBE 5 IP

FEATURES

- 30 Controllable sections of RGBW area
- 30 Shot out sections of Cold White Beams
- Applied the Smart Glass as frontal glass, providing changeable frosted/transparent effect
- Individual powerful beams output in a creative way
- Outstanding color mixing
- Dynamic strobing vivid effect
- Hiding twist-lock design for quickly tool-free combining
- 0~100% Smooth Dimming
- Four preset dimming curves apply to different effect applications




TECHNICAL SPECIFICATIONS

Specifications

- Light Source: 240 x 15W RGBW LED
30 x 10W CW LED
- Color Temperature(CW): 6,300K
- Beam Angle:
RGBW: 104°
CW Beam: 3.5°
- Full Open under frosted: 110°
- Field Angle:
RGBW: 140°
CW Beam: 7°

PHOTOMETRICS DIAGRAM

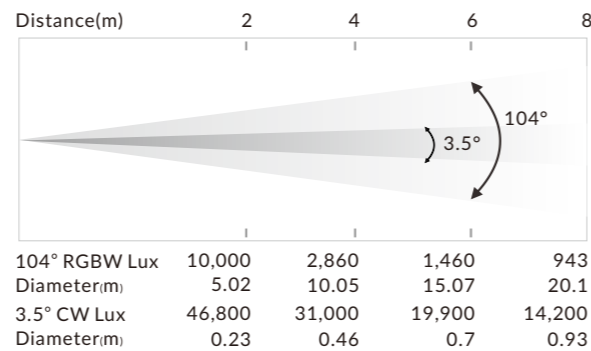

Control

- Control channels: 10/17/24/21/26/36/41/61/150/158
- Protocols: DMX512,RDM,Art-Net,sACN
- Firmware Upgrade: Upgrade via DMX link



Construction

- Display: Color Display
- Power In/Out: Waterproof Power Connector In/Out
- Data In/Out: 3-pin/5-pin Waterproof XLR Socket, RJ45 In & Out
- Protection rating: IP66

Electrical and Physical

- Input Voltage Range: 100-240V~ 50/60Hz
- Power consumption: 1,570W
- Dimensions: 482.5 x 212 x 259mm (19"x8.4"x10.2")
- F/C Dimensions: 1180 x 625 x 475mm (46.4"x24.6"x18.7")
- Carton Dimensions: 590 x 320 x 390mm (23"x13"x15")
- Weight: 14kg (30.9 lbs)
97.5kg(215lbs)(include flight case,quad loader case)
16.5kg(36.4lbs)(include carton,one-pack per carton)




FULL OPEN TRANSPARENT


FULL OPEN BY FROSTED

FUNCTIONAL EFFECT

CIE1931 CHROMATICITY COORDINATES

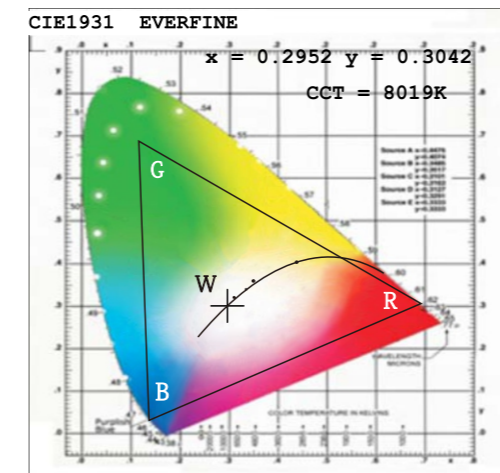

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

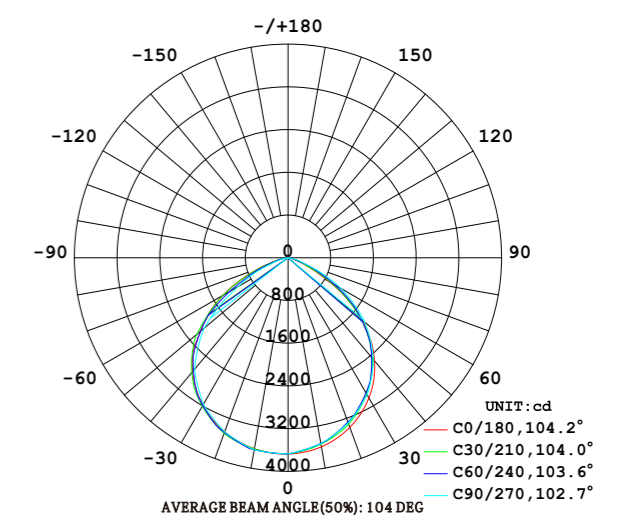

DIMENSIONS mm (in.)

