

THUNDER BREAKER

BL-200 VS

FEATURES

- 144 zones can be controlled individually
- Outstanding strobe effect with variable speed
- Compact size, light weight
- Smooth dimming from 0-100%
- Protection rating: IPX4
- can be easily combined with each other or with other BL200 series



TECHNICAL SPECIFICATIONS

Specifications

- Light Source: 576 x 0.8 W RGBW LED
- Beam Angle: 110°
- Field Angle: 150°

Control

- DMX Channel: 6+/11+/12+/13A+/13B+/17+/21A+/21B+/29+/37+/41+/53+Pixel
- Control mode: DMX512,RDM ,sACN,Art-Net
- Firmware Upgrade via DMX link or USB disk



Construction

- Display: LED display
- Date In/Out: 3-pin or 5-pin IP XLR,RJ45
- Power In /Out: Waterproof Power Connector in/out
- Protection Rating: IPX4

Electrical and Physical


- Input voltage range: 100-240V~ 50/60Hz
- Power Consumption: 395 W
- Dimensions: 503 x 318 x 183 mm (19.8"x12.5"x7.2")
- Flight Case Dimensions: 1075 x 565 x 535 mm (42.3" x 22.2" x 21.1")
- Weight: 10.5 kg (23.1 lbs)
- 81 kg (178.6 lbs)(Quad Loader Case)

PHOTOMETRICS DIAGRAM

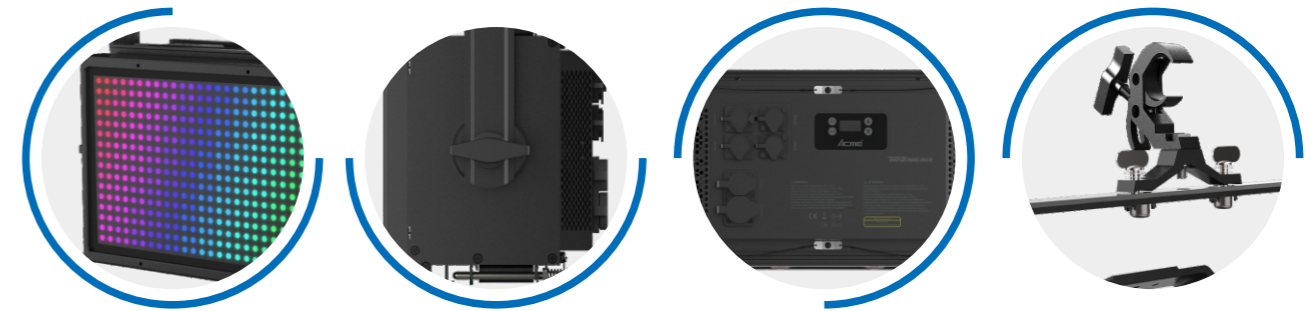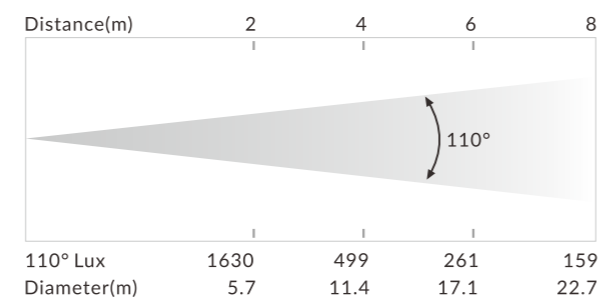


LIGHT QUALITY PARAMETER

CIE1931 CHROMATICITY COORDINATES(Big Angle)

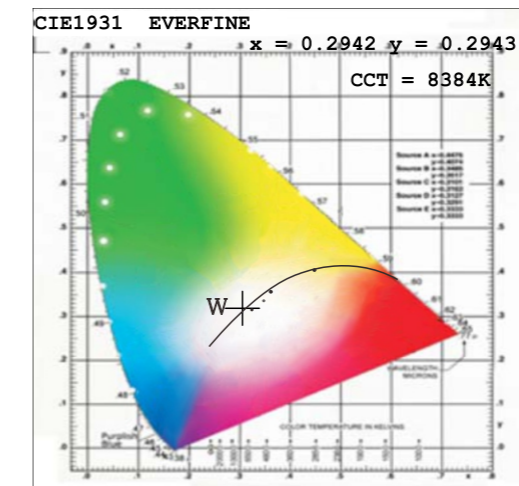

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

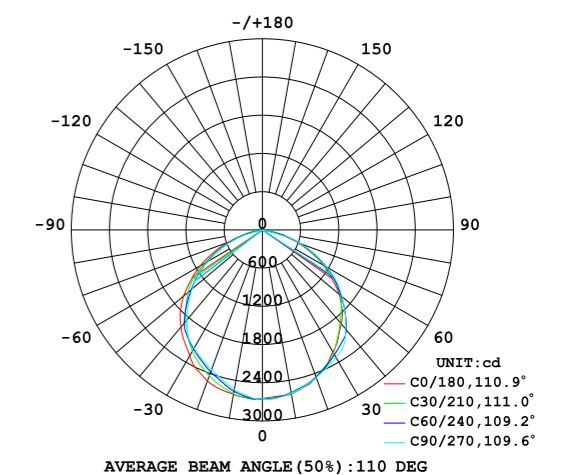

DIMENSIONS

