

THUNDER

BL-200 CP

FEATURES

- Variable CTO: 2,800K - 8,000K
- High brightness, smooth color mixing, powerful wash effect
- 3 x led zones can be controlled individually
- Smooth dimming from 0-100%
- Outstanding strobe effect with variable speed
- Equipped with a special patented plug structure, can be easily combined with each other or with other BL200 series



TECHNICAL SPECIFICATIONS

Specifications

- Light Source: 1,188 pcs x 0.8 W RGBW LED
- Angle:
 - Beam Angle: 110°
 - Field Angle: 152°

Control

- DMX Channel: 4(8 bit)/8(16 bit)/8/9(16 bit)/16 channels
- Protocols: DMX512, RDM
- Firmware Upgrade via DMX link


Construction

- Display: OLED display
- Data In/Out: 3-pin or 5-pin IP XLR
- Power In/Out: Waterproof Power Connector in/out
- Protection Rating: IPX4

Electrical and Physical

- Input Voltage Range: 100-240V~ 50/60Hz
- Power Consumption: 515 W
- Dimensions: 503 x 183 x 318mm (19.8" x 7.2" x 12.5")
- F/C Dimensions: 1,245 x 570 x 648 mm (49.0" x 22.4" x 25.5")
- Weight: 10.5 kg (23.1 lbs)
126 kg (278 lbs)(Eight-pack Loader Case)

PHOTOMETRICS DIAGRAM

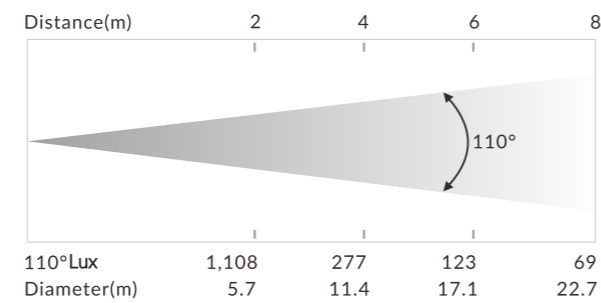


JOINT SCHEMATICS




LIGHT QUALITY PARAMETER

CIE1931 CHROMATICITY COORDINATES(Big Angle)

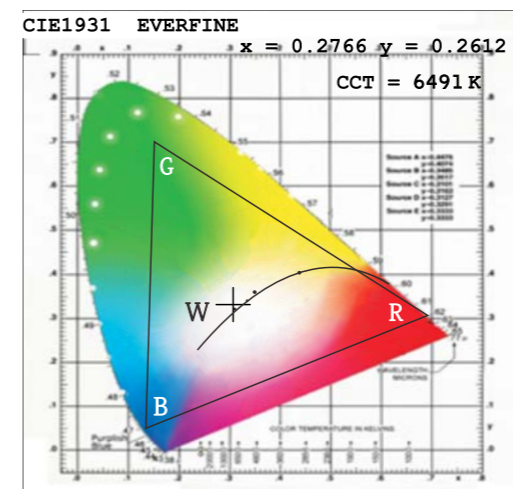

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

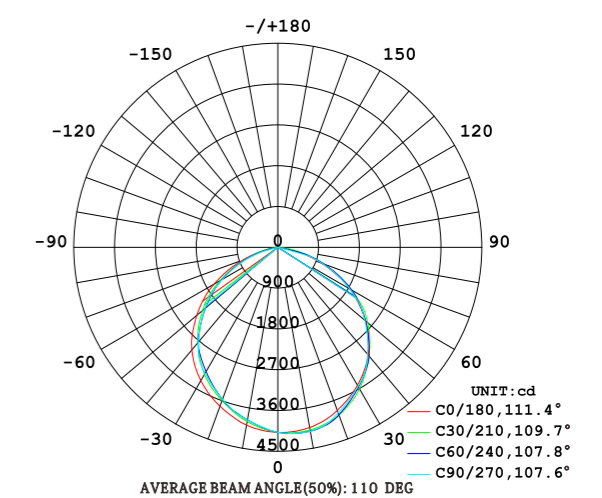

DIMENSIONS

