

DOTUS™

BEAM 15

FEATURES

- Compact design, light in weight
- Narrow beam, high brightness
- Dial switch to set DMX address

TECHNICAL SPECIFICATIONS

Specifications

- Light Source: 20W RGBA
- Beam Angle: 4°

Control

- DMX channel: 7
- Protocols: DMX512, RDM
- Firmware Upgrade via DMX link

Construction


- Data In/Out: 3-pin or 5-pin XLR
- Power In/Out: IEC Power Connector in/out
- Protection Rating: IP20

Electrical and Physical

- Input Voltage Range: **180-240V~ 50/60Hz**
- Power Consumption: 10W
- Dimension: 124x70x229mm (4.9"x2.8"x9.0")
- Carton deimension: 540x340x595mm (21.3"x13.4"x23.4")
- Weight: 0.7kg (1.5lbs)
19.5kg (43.0lbs) (20-pack per carton)




PHOTOMETRICS DIAGRAM

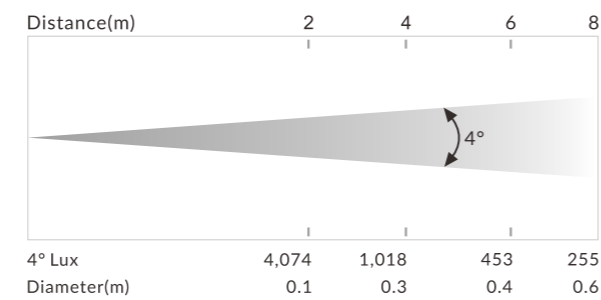


LIGHT QUALITY PARAMETER

CIE1931 CHROMATICITY COORDINATES(Big Angle)

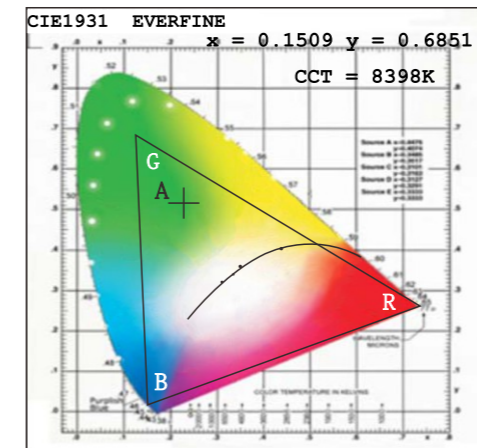

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

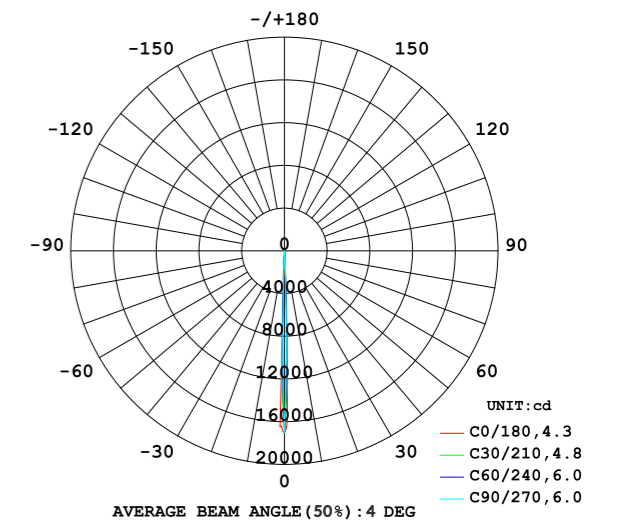

DIMENSIONS

