


GINAMP™

STROBE 2

FEATURES

- Compact in size, light in weight
- Two types of LEDs are used: 48 pcs LED in the center and 800 pcs 5050 RGB components around the tube.
- 40 x LED zones and 6 x strobe tube zones can be controlled individually
- Smooth dimming and color mixing
- Ultra-high stunning output with multiple speeding strobes

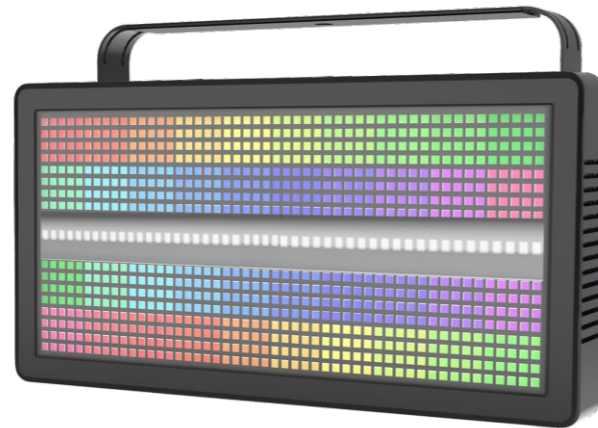

TECHNICAL SPECIFICATIONS

Specifications

- Light Source 1 : 800 x 0.3W 5050RGB
- Light Source 2 : 48 x 5W LED
- Beam Angle:
RGB LED Zones: 121°
Strobe Tube: 89°

Control

- DMX Channel: 6/13/18/36/126
- Control Mode: DMX512, RDM
- Firmware Upgrade via DMX link


Construction

- Display: OLED display
- Data In/Out: 3-pin or 5-pin XLR
- Power In/Out: Power Connector in/out
- Protection Rating: IP20

Electrical and Physical


- Power Voltage Range: 100-240V~ 50/60Hz
- Power Consumption: 325W
- Dimensions: 410 x 210 x 120mm(16.1" x 8.3" x 4.7")
- Carton Dimension: 505 x 285 x 210mm(19.9" x 11.2" x 8.3")
- Weight: 5.3 kg(11.7 lbs)
6.2 kg (13.7 lbs)(One-pack per carton)

PHOTOMETRICS DIAGRAM

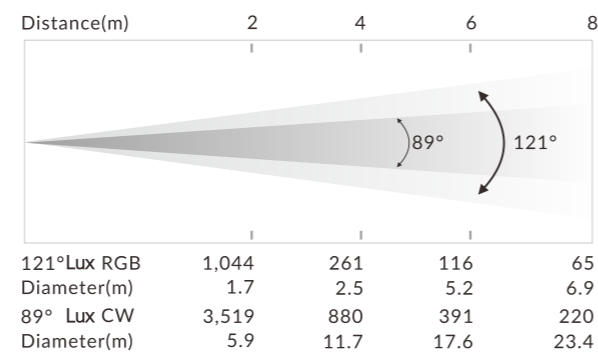


LIGHT QUALITY PARAMETER


CIE1931 CHROMATICITY COORDINATES

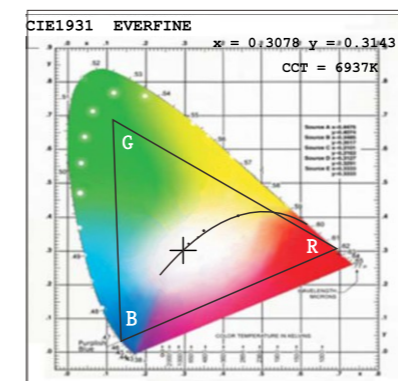


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM (RGB)

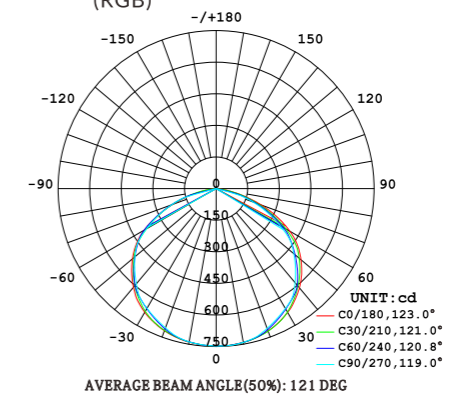

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM (CW)

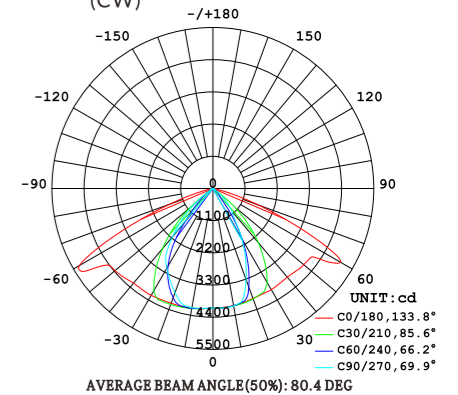

DIMENSIONS

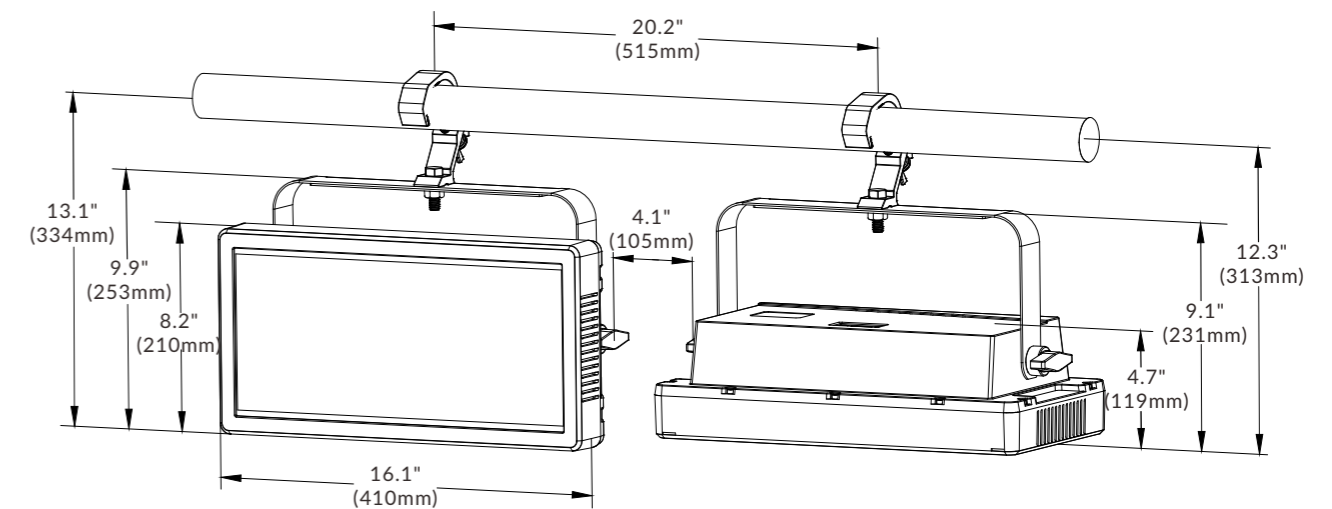

PROJECT INSTALLATION

PROJECT INSTALLATION