

FARANDOLE

AM-BAR



Control

DMX Channel: 6/9 Channels
Control Mode: DMX512, RDM
Firmware Upgrade: Update via DMX link


Construction

Display: LED display
Data In/Out: 3-pin XLR
Power In/Out: Power Connector in/out
Protection Rating: IP20


Electrical and Physical

Power Voltage: AC 100~240V, 50/60Hz
Power Consumption: 140W
Dimensions: 990x150x144mm (39.0"x5.9"x5.7")
Weight: 4.9kg (10.8lbs)

Photometrics Diagram



Dimensions(mm)

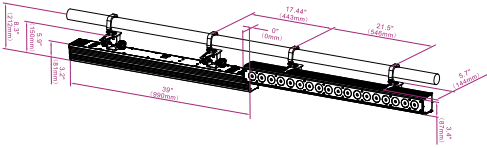

Specifications

Light Source: 18x8W RGBW LED
Beam Angle: 16°
Luminous Flux: 6708lm

Features

Efficient LED lens, uniform color mixing, which makes the light effect better
0~100% smooth dimming
Adjustable electronic strobe effect
Suitable for fixed installation or mobile performance
The fixture can be adjusted to 180° backward and forward by double mounting brackets